

115 to 170 mm -Use Sika Grout 212 HP
Mixed with P-Metal 507 mm Stone
P-metal 10kg/ 25kg Grout

170 mm plus -Use Concrete 30 MPa @ 28 days
Broom Finish to Minimise Slip

Waterblast Area before applying
Epoxy Resin Bonding Agent
(Sikadur 32)

Aluminium Cover Set

300 Nib

110 mm Ref Class D210kN

Standard Sika Kitset Reo
complete with D 12 Trimmers **Tied** to Starter Bars

Bitumen If Required

80

50


80 Min

90 130

ANCHOR LEVELLING BOLTS
4 OFF- M16 X 170 LG MS Threaded Rod
Drill Dia 18 x 70 Deep
Epoxied using Epcon C6 Resin

STARTER BARS D12 Tied to Sika Kitset Reo
Drill Dia 14 x 80 Deep **Staggered** @ 150 Ctrs Typ
Epoxied using Epcon C6 Resin

Concrete Chamber Roof

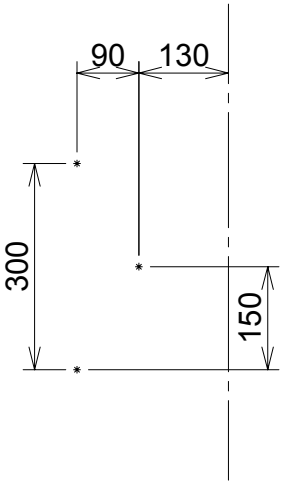

Note: Covers **MUST** be fitted and locked in place before pouring Grout/Concrete surround to avoid any possible frame distortion during the curing cycle.

D210kN Cover Set Concrete Chamber Roof 'T' Frame Shallow Installation